


Steel Door Armor DIY Installation

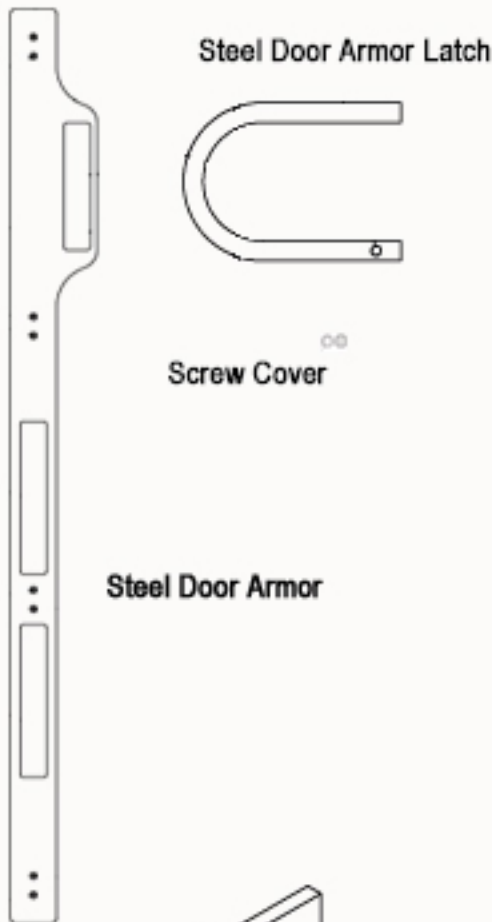

In Figure A

1. Start by removing the strike plate from the door frame
2. Place Steel Door Armor Inside the frame flat side facing out.
3. Using the 3" screws included in your pack, screw Steel Door Armor in place
- 4 Place door latch to door, set screw cover in place, insert screw, close screw cover

In Figure B

1. With door closed, swing latch into opening of Steel Door Armor

Final Notes

Steel Door Armor is made to install if door opens to the left or right.
Lock holes are universal for any standard lock placements

Tools Needed
Cordless screwdriver

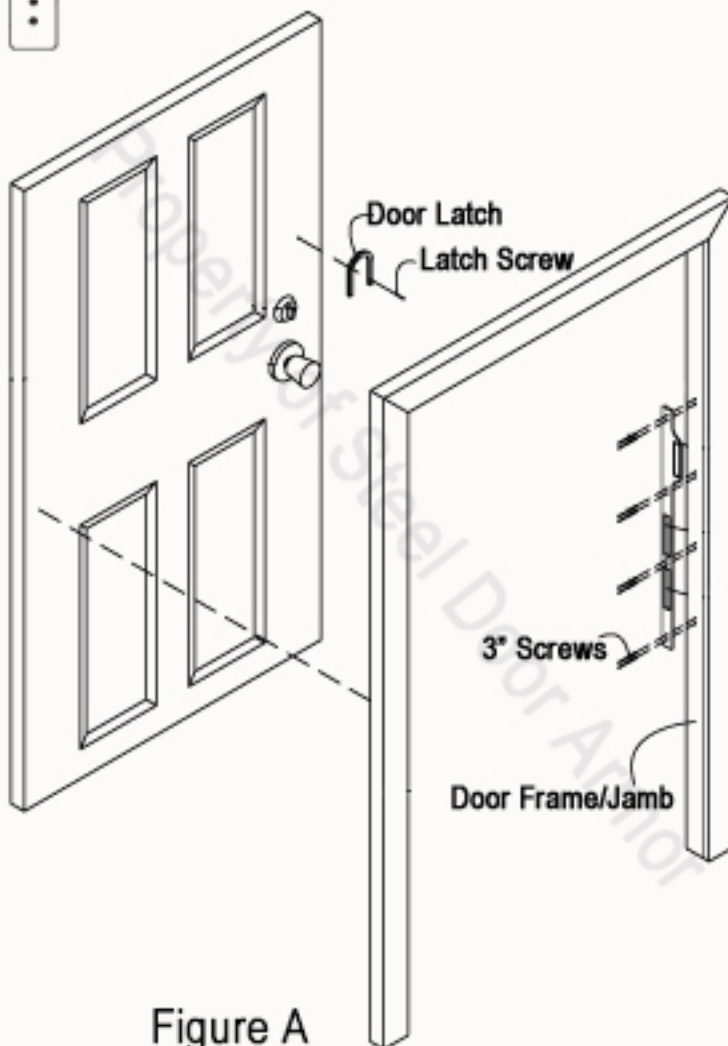


Figure A

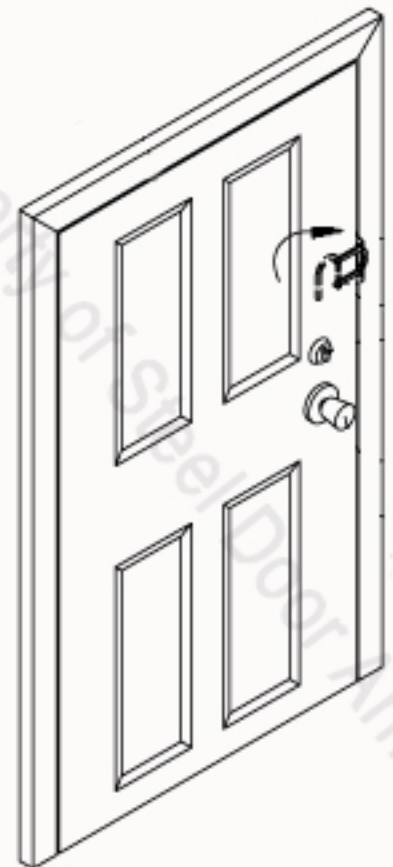


Figure B